

CS-508 Modern Programming Update MCQS For Final Term Solve By Vu Topper RM

85% To 100% Marks



وَتَعَزُّ مِّن تَشَاءِ وَتُدُلُّ مِّن تَشَاءِ



PROFESSIONAL ONLINE ACADEMY

We Offers

LMS Handling

Important Notes

Online Classes

Assignments

Quiz & GDB's

Projects


**NOTHING
IS
IMPOSSIBLE**

**Join Us
Now**

For More Info
Contact us at:

Rizwan Manzoor

☎ **0322-4021365**

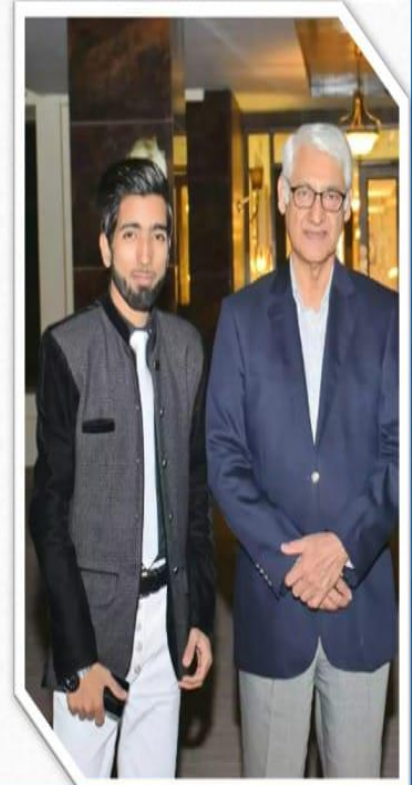

برى صحبت سے تہائی بہتر ہے اور تہائی سے نیک صحبت بہتر ہے

For More Help Contact What's app 03224021365

1. In JavaScript, navigator is a _____ object

Select the correct option

- a. Browser
- b. User defined
- c. Built-in
- d. Document

2. Which of the following type of numbers are not supported by PHP?

Select the correct option

- a. Real Numbers
- b. Unsigned Integers
- c. Complex Numbers
- d. Signed Integers

3. Which of the following language is used for server-side scripting?

select the correct option

- a. PHP
- b. C#
- c. Ada
- d. C++

4. The model in JavaScript provides access to the contents of the browser window.

بري صحبت سے تہائی بہتر ہے اور تہائی سے نیک صحبت بہتر ہے

For More Help Contact What's app 03224021365

Select the correct option

- a. DOM
- b. BOM
- c. ROM
- d. COM

5. The code written in PHP is returned to the web browser as:

Select the correct option

- a. Applets
- b. Plain HTML
- c. Shell scripts
- d. CSS flexbox

6. Which of the given is used before the declaration of variable in PHP?

Select the correct option

- a. #sign
- b. \$ sign
- c. ? sign
- d. @sign

7. An in PHP is an ordered map.

Select the correct option

- a. string
- b. array
- c. queue
- d. stack

8. In the 'break' statement may have an optional parameter or argument.

بري صديت سے تتهائي بهر ہے اور تتهائي سے ليک صديت بهر ہے

For More Help Contact What's app 03224021365

Select the correct option

- a. C#
- b. C/C++
- c. Java
- d. PHP

9. In PHP 'switch' structure, the starts or implements an implicit loop.

Select the correct option

- a. Break Statement
- b. Continue Statement
- c. For Loop
- d. Return Statement

10. In JavaScript, "with" statement is an alternative of

select the correct option

- a. Multiple document.write statements
- b. While statement
- c. Single document.write statement
- d. Union statement

11. In how many places a javascript code can be placed?

Select the correct option

- a. 3

بري صحبت سے تتهائي بهتر ہے اور تتهائي سے نيك صحبت بهتر ہے

For More Help Contact What's app 03224021365

- c. 4
- d. 6

12. If an integer variable is not initialized in PHP then its default value will be:

Select the correct option

- a. Zero
- b. False
- c. NULL
- d. One

13. In PHP, if a number is beyond the bounds of the integer type, then it will be interpreted as a instead.

Select the correct option

- a. string
- b. short
- c. float
- d. long

14. In JavaScript, which of the given provides access to the contents of browser window?

select the correct option

- a. BOM
- b. ROM
- c. DOM
- d. COM

15. The scripts written in PHP are executed by:

Select the correct option

بری صحبت سے تنہائی بہتر ہے اور تنہائی سے نیک صحبت بہتر ہے

For More Help Contact What's app 03224021365

- a. Web browser
- b. Java
- c. Applet Client machine
- d. Web Server

16. Arrays in JavaScript are based.

Select the correct option

- a. Length
- b. One
- b. Index Location
- d. Zero Index

17. Classes and objects of PHP are similar to

Select the correct option

- a. Classes and objects of Basic
- b. Classes and objects of C
- c. Classes and objects of Java
- d. Classes and objects of C++

18. Which of the following type of numbers are not supported by PHP?

select the correct option

- a. Complex Numbers
- b. Unsigned Integers
- c. Real Numbers
- d. Signed Integers

19. To dynamically generate a web page, which of the following programming language is most suitable?

بري صحبت سے تنہائی بہتر ہے اور تنہائی سے لپکے صحابہ بہتر ہے

For More Help Contact What's app 03224021365

the correct option

a. PHP

b. C++

c. Ada

d. Prolog

20. The scripts written in PHP are executed by:

Select the correct option

a. Web Server

b. Web browser

c. Client machine

d. Java Applet

21. Which of the given is used before the declaration of variable in PHP?

Select the correct option

a. ? sign

b. @sign

c. #sign

d. \$ sign

22. The data type of variable in PHP is automatically determined by its:

select the correct option

a. Name

b. Location

c. Size

d. Value

23. an object that describes the basic characteristics of the browser, notably its type and version. Select the correct option

برای صحبت سے تہائی بہتر ہے اور تہائی سے نیک صحبت بہتر ہے

For More Help Contact What's app 03224021365

- a. Window
- b. Navigator
- c. Document
- d. Location

24. How many <script> tags can be used in the <head> element?

Select the correct option

- a. One
- b. Many
- c. Zero
- d. Two

25. Which of the following language is used for server-side scripting?

Select the correct option

- a. C#
- b. Ada
- c. C++
- d. PHP

26. An in PHP is an ordered map.

Select the correct option

- a. queue
- b. array
- c. stack
- d. string

27. In Strings and numeric values are inter convertible

Select the correct option

a. C#

b. C/C++
بری صحبت سے تہائی بہتر ہے اور تہائی سے نیک صحبت بہتر ہے

For More Help Contact What's app 03224021365

- c. PHP
- d. Java

28. In JavaScript, "with" statement is an alternative of
Select the correct option

- a. While statement
- b. Union statement
- c. Multiple document.write statements
- d. Single document.write statement

29. In PHP switch structure, the starts or implements an implicit loop.
Select the correct option

- a. Return Statement
- b. Break Statement
- c. Continue Statement
- d. For Loop

برى صحبت سے تڻهائى بهتر هے اور تڻهائى سے نيك صحبت بهتر هے

For More Help Contact What's app 03224021365

Question # 6 of 10 (Start time: 10:39:13 AM, 19 July 2023)

Total Marks:

PHP stands for _____ .

Select the correct option

PHP: Home Preprocessor

PHP: Hypertext Preprocessor

PHP: Hypertext Page

PHP: Home Page

Question # 7 of 10 (Start time: 10:39:36 AM, 19 July 2023)

Total Marks: 1

In JavaScript, navigator is a _____ object.

Select the correct option

<input type="radio"/>	User defined
<input checked="" type="radio"/>	Browser
<input type="radio"/>	Document
<input type="radio"/>	Built-in

Question # 10 of 10 (Start time: 10:40:55 AM, 19 July 2023)

Total Marks: 1

To dynamically generate a web page, which of the following programming language is most suitable?

Select the correct option



Reload Math Equations

<input type="radio"/>	Ada
<input type="radio"/>	C++
<input type="radio"/>	Prolog
<input checked="" type="radio"/>	PHP

Question # 9 of 10 (Start time: 10:40:33 AM, 19 July 2023)

Total Marks: 1

In _____, Strings and numeric values are inter convertible

Select the correct option

<input type="radio"/>	C/C++
<input type="radio"/>	Java
<input type="radio"/>	PHP
<input checked="" type="radio"/>	C#

Question # 5 of 10 (Start time: 10:12:13 AM, 19 July 2023)

Total Marks: 1

To dynamically generate a web page, which of the following programming language is most suitable?

Select the correct option



Reload Math Equations

<input type="radio"/>	Prolog
<input type="radio"/>	PHP
<input type="radio"/>	C++
<input type="radio"/>	Ada

Question # 1 of 10 (Start time: 10:10:14 AM, 19 July 2023)

Total Marks:

In JavaScript, navigator is a _____ object.

Select the correct option

<input type="radio"/>	User defined
<input checked="" type="radio"/>	Browser
<input type="radio"/>	Document
<input type="radio"/>	Built-in

Question # 2 of 10 (Start time: 10:11:00 AM, 19 July 2023)

Total Marks: 1

The division of two integers (i.e. $7/2$) in PHP generates a/an:

Select the correct option



Reload Math Equations



Floating point number



Integer



Exception



Runtime error

Question # 4 of 10 (Start time: 10:11:56 AM, 19 July 2023)

Total Marks:

Arrays in JavaScript are _____ based.

Select the correct option

<input type="radio"/>	One Index
<input type="radio"/>	Length
<input checked="" type="radio"/>	Zero Index
<input type="radio"/>	Location

Question # 3 of 10 (Start time: 10:11:28 AM, 19 July 2023)

Total Marks:

Which of the given is used before the declaration of variable in PHP?

Select the correct option

<input type="radio"/>	@ sign
<input type="radio"/>	# sign
<input checked="" type="radio"/>	\$ sign
<input type="radio"/>	? sign

Question # 6 of 10 (Start time: 10:12:43 AM, 19 July 2023)

Total Marks

In _____, the 'break' statement may have an optional parameter or argument.

Select the correct option

<input type="radio"/>	Java
<input type="radio"/>	C#
<input type="radio"/>	C/C++
<input checked="" type="radio"/>	PHP

Question # 8 of 10 (Start time: 10:13:31 AM, 19 July 2023)

Total Marks:

In PHP 'switch' structure, the _____ starts or implements an implicit loop.

Select the correct option

<input checked="" type="radio"/>	Continue Statement
<input type="radio"/>	Break Statement
<input type="radio"/>	Return Statement
<input type="radio"/>	For Loop

Question # 7 of 10 (Start time: 10:13:08 AM, 19 July 2023)

Total Marks: 1

Which operator is used for concatenation in JavaScript?

Select the correct option

<input checked="" type="radio"/>	+
<input type="radio"/>	
<input type="radio"/>	\$
<input type="radio"/>	dot(.)

Question # 3 of 10 (Start time: 10:17:48 AM, 19 July 2023)

Total Marks: 1

The resultant value of variable 'x' in JavaScript statement `var x = "5" - "2" ;` will be _____.

Select the correct option

<input type="radio"/>	52
<input type="radio"/>	"5"-2"
<input checked="" type="radio"/>	3
<input type="radio"/>	5-2

Question # 10 of 10 (Start time: 10:14:18 AM, 19 July 2023)

Total Marks: 1

The resultant value of variable 'x' in JavaScript statement `var x = "5" - "2" ;` will be _____.

Select the correct option

<input type="radio"/>	5-2
<input checked="" type="radio"/>	3
<input type="radio"/>	52
<input type="radio"/>	"5"-2"

Question # 2 of 10 (Start time: 10:17:21 AM, 19 July 2023)

Total Marks: 1

In JavaScript, which of the given provides access to the contents of browser window?

Select the correct option

<input type="radio"/>	COM
<input type="radio"/>	ROM
<input type="radio"/>	BOM
<input checked="" type="radio"/>	DOM

Question # 1 of 10 (Start time: 10:16:56 AM, 19 July 2023)

Total Marks:

How many <script> tags can be used in the <head> element?

Select the correct option

<input type="radio"/>	Two
<input type="radio"/>	Zero
<input type="radio"/>	One
<input checked="" type="radio"/>	Many

Question # 9 of 10 (Start time: 10:13:55 AM, 19 July 2023)

Total Marks: 1

The code written in PHP is returned to the web browser as:

Select the correct option



Reload Math Equations

<input checked="" type="radio"/>	Plain HTML
<input type="radio"/>	Shell scripts
<input type="radio"/>	Applets
<input type="radio"/>	CSS flexbox

Question # 7 of 10 (Start time: 10:19:22 AM, 19 July 2023)

Total Marks

PHP stands for _____ .

Select the correct option

<input checked="" type="radio"/>	PHP: Hypertext Preprocessor
<input type="radio"/>	PHP: Home Preprocessor
<input type="radio"/>	PHP: Hypertext Page
<input type="radio"/>	PHP: Home Page

Question # 8 of 10 (Start time: 10:20:00 AM, 19 July 2023)

Total Marks:

The scripts written in PHP are executed by:

Select the correct option



Reload Math Equations

<input checked="" type="radio"/>	Web Server
<input type="radio"/>	Java Applet
<input type="radio"/>	Client machine
<input type="radio"/>	Web browser

Question # 6 of 10 (Start time: 10:19:05 AM, 19 July 2023)

Total Marks: 1

Which of the following language is used for server-side scripting?

Select the correct option



Reload Math Equations



Ada



C#



C++



PHP

Question # 4 of 10 (Start time: 10:18:14 AM, 19 July 2023)

Total Marks:

Which of the given operator is used to return a reference from a function in PHP?

Select the correct option

<input checked="" type="radio"/>	&
<input type="radio"/>	&&
<input type="radio"/>	Dot
<input type="radio"/>	\$

Question # 9 of 10 (Start time: 10:20:26 AM, 19 July 2023)

Total Marks:

Which of the given is used before the declaration of variable in PHP?

Select the correct option

<input type="radio"/>	@ sign
<input type="radio"/>	# sign
<input type="radio"/>	? sign
<input checked="" type="radio"/>	\$ sign

Question # 10 of 10 (Start time: 10:20:54 AM, 19 July 2023)

Total Marks:

To dynamically generate a web page, which of the following programming language is most suitable?

Select the correct option



Reload Math Equations

<input checked="" type="radio"/>	PHP
<input type="radio"/>	Prolog
<input type="radio"/>	C++
<input type="radio"/>	Ada

Question # 3 of 10 (Start time: 10:37:40 AM, 19 July 2023)

Total Marks:

"with" statement in JavaScript is an alternative of _____.

Select the correct option

<input type="radio"/>	Multiple 'document.read' Statements
<input type="radio"/>	Single 'document.read' Statement
<input checked="" type="radio"/>	Multiple 'document.write' Statements
<input type="radio"/>	Single 'document.write' Statement

Question # 4 of 10 (Start time: 10:38:10 AM, 19 July 2023)

Total Marks:

Which of the given is used before the declaration of variable in PHP?

Select the correct option

<input type="radio"/>	? sign
<input type="radio"/>	# sign
<input checked="" type="radio"/>	\$ sign
<input type="radio"/>	@ sign

Question # 5 of 10 (Start time: 10:18:37 AM, 19 July 2023)

Total Marks:

The _____ model in JavaScript provides access to the contents of the browser window.

Select the correct option

<input type="radio"/>	BOM
<input type="radio"/>	ROM
<input checked="" type="radio"/>	DOM
<input type="radio"/>	COM

Question # 1 of 10 (Start time: 10:36:35 AM, 19 July 2023)

Total Marks: 1

_____, an object that describes the basic characteristics of the browser, notably its type and version.

Select the correct option

<input type="radio"/>	Document
<input type="radio"/>	Location
<input checked="" type="radio"/>	Navigator
<input type="radio"/>	Window

Question # 2 of 10 (Start time: 10:36:57 AM, 19 July 2023)

Total Marks

In JavaScript, "with" statement is an alternative of _____

Select the correct option

<input type="radio"/>	While statement
<input checked="" type="radio"/>	Multiple document.write statements
<input type="radio"/>	Single document.write statement
<input type="radio"/>	Union statement

Question # 5 of 10 (Start time: 10:38:46 AM, 19 July 2023)

Total Marks:

The _____ model in JavaScript provides access to the contents of the browser window.

Select the correct option

<input checked="" type="radio"/>	DOM
<input type="radio"/>	ROM
<input type="radio"/>	COM
<input type="radio"/>	BOM

Question # 8 of 10 (Start time: 10:39:50 AM, 19 July 2023)

Total Marks: 1

The data type of variable in PHP is automatically determined by its:

Select the correct option



Reload Math Equations

<input type="radio"/>	Size
<input checked="" type="radio"/>	Value
<input type="radio"/>	Location
<input type="radio"/>	Name

بري صحبت سے تنہائی بہتر ہے اور تنہائی سے نيك صحبت بہتر ہے

For More Help Contact What's app 03224021365